


EKALDES® CITIES ARE BEAUTIFUL WITH US

Armatür
Datasheet/Katalog

Fixtures
Datasheet/Catalog

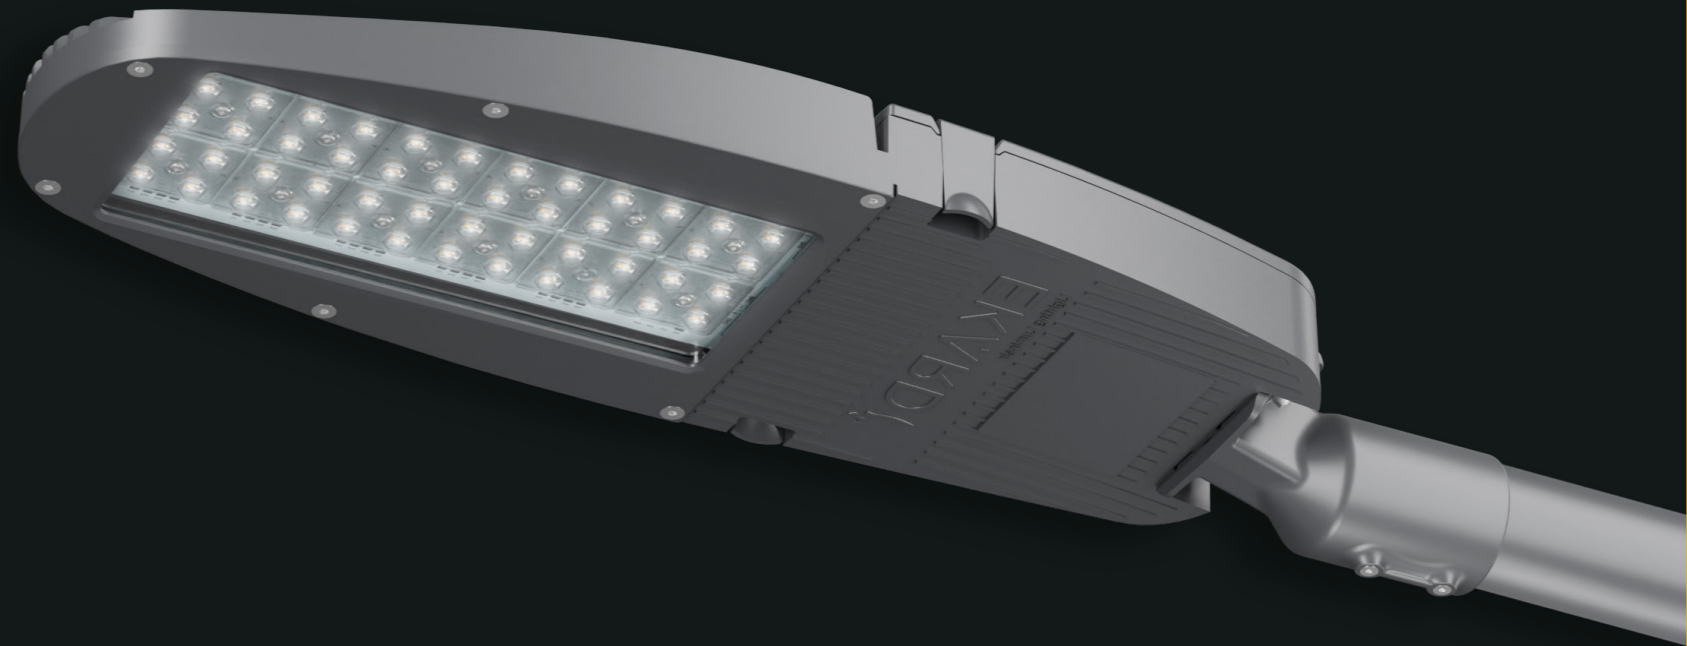

rigel - B


ekr-100W

CE  IK08 IP66


Product Detail

Rated power:	100W
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common mode 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Weight:kg.

Nema socket
7pin

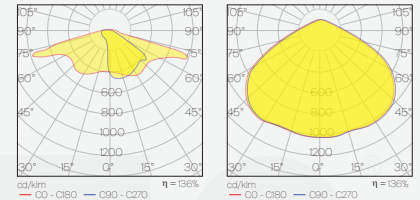

P. Code	P. Name	Power	Lumen	C. Tempeture	Control	Weight
EKR-70W	Rigel - B	70 W	10.150lm.	3000 K , 4000 K	On/Off, DALIkg.
EKR-80W	Rigel - B	80 W	11.106lm.	3000 K , 4000 K	On/Off, DALIkg.
EKR-90W	Rigel - B	90 W	13.050lm.	3000 K , 4000 K	On/Off, DALIkg.
EKR-100W	Rigel - B	100 W	14.500lm.	3000 K , 4000 K	On/Off, DALIkg.

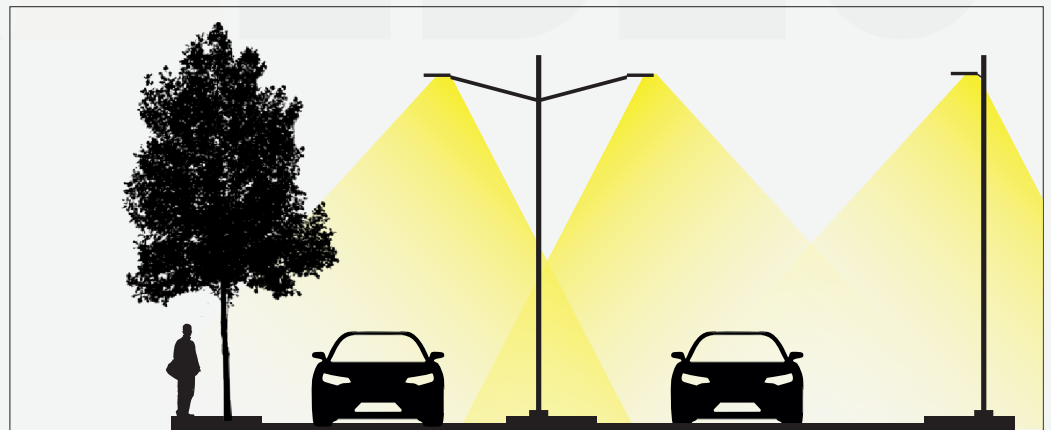

rigel - S



ekr-60W

CE  IK08 IP66



Product Detail

Rated power:	60W
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common mode 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Weight:kg.

Nema socket
7pin

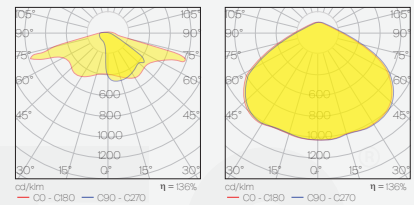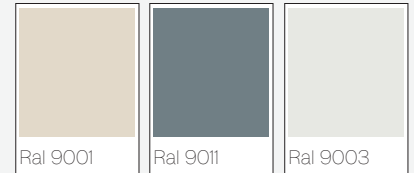

P. Code	P. Name	Power	Lumen	C. Tempeture	Control	Weight
EKR-40W	Rigel - S	40 W	5.800lm.	3000 K , 4000 K	On/Off, DALIkg.
EKR-60W	Rigel - S	60 W	8.700lm.	3000 K , 4000 K	On/Off, DALIkg.

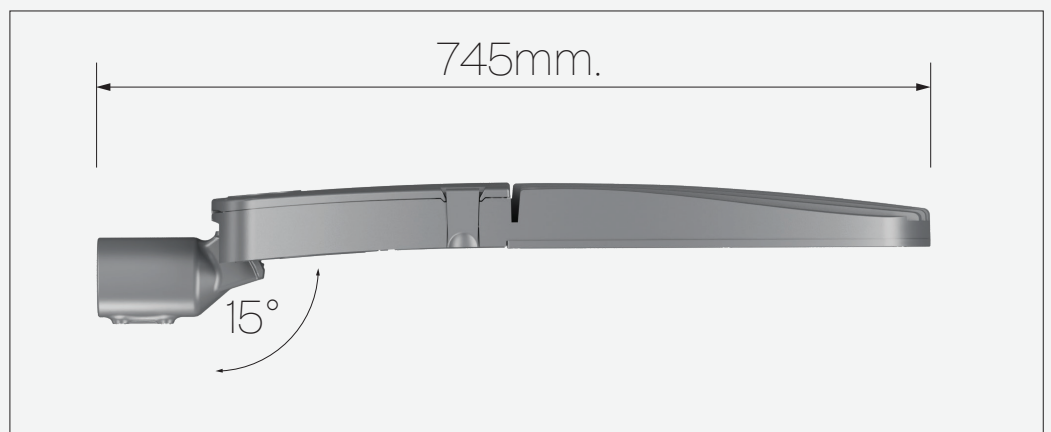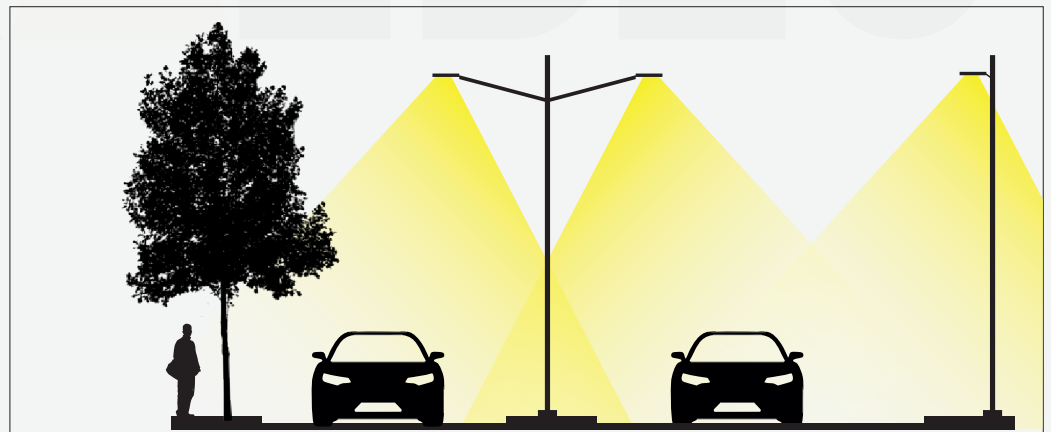

Ridge

25-50W



CE  IK08 IP66

Product Detail



Rated power:	50W
Lumen efficacy (Luminaire):	min. 7250 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	492 (W) X 183 (L) X 97 (H)
Weight:	3.02kg.

Nema socket
7pin

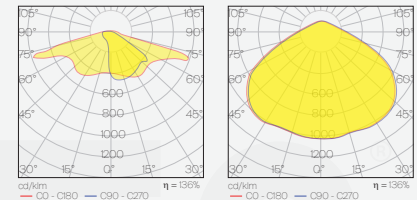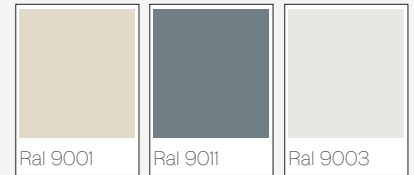

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	25 W	3.625lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	50 W	7.250lm.	2700 K , 6500 K	On/Off, DALIkg.

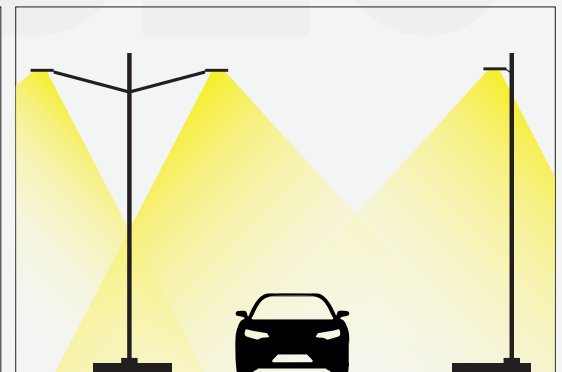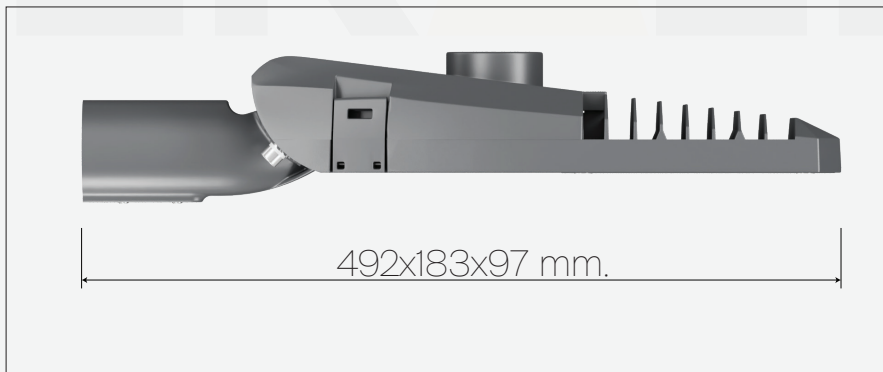

Ridge



50-80W

CE  IK08 IP66



Product Detail

Rated power:	80W
Lumen efficacy (Luminaire):	min. 11.600 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI Step-DIM 0 - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	652 (W) X 263 (L) X 121 (H)
Weight:	5.56kg.

Nema socket
7pin

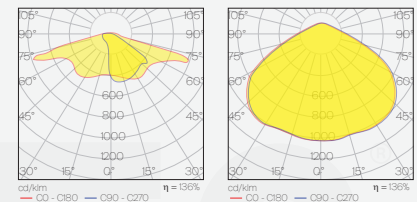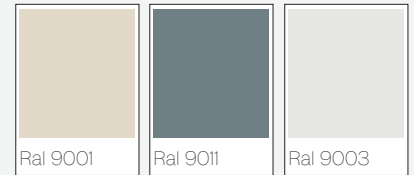

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	50 W	7.250lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	80 W	11.600lm.	2700 K , 6500 K	On/Off, DALIkg.

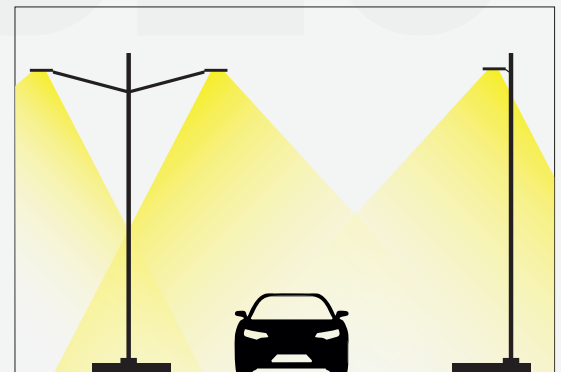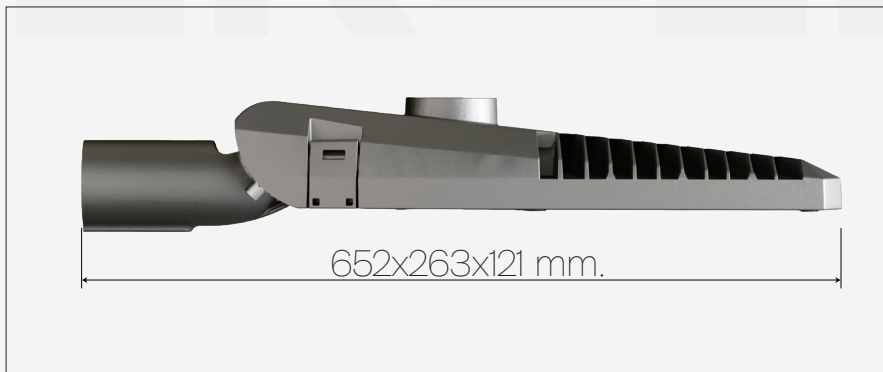

Ridge

80-150W



CE  IK08 IP66

Product Detail



Rated power:	150W
Lumen efficacy (Luminaire):	min. 21.750 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI Step-DIM 0 - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	652 (W) X 263 (L) X 121 (H)
Weight:kg.

Nema socket
7pin

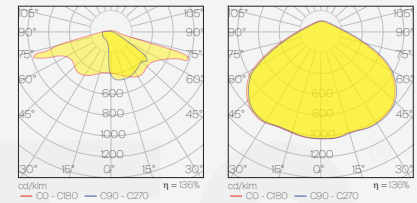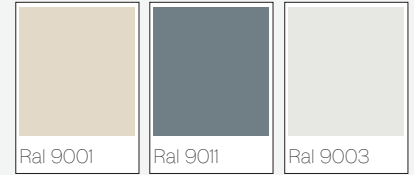

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	80 W	11.600lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	150 W	21.750lm.	2700 K , 6500 K	On/Off, DALIkg.

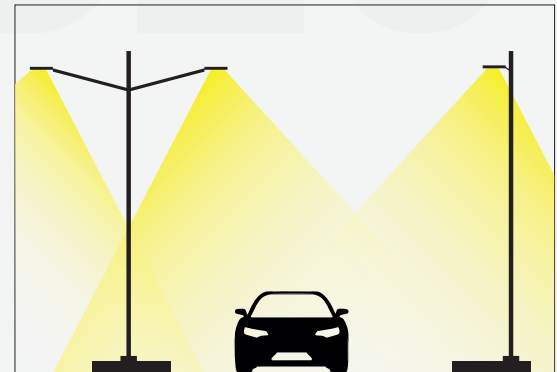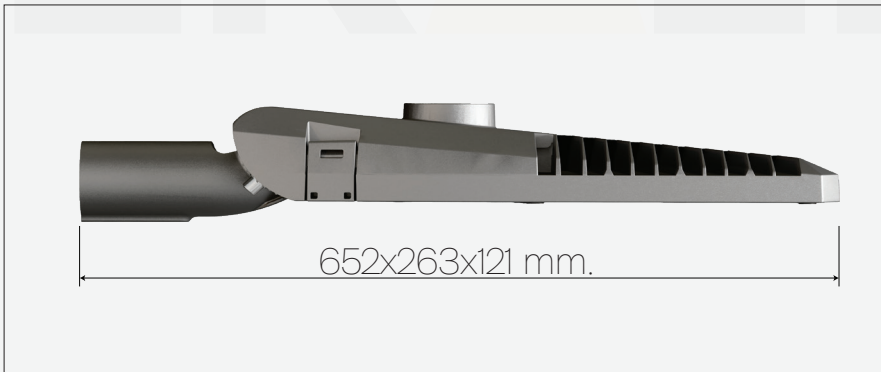

Ridge

150-320W




CE  IK08 IP66

Product Detail


Rated power:	320W
Lumen efficacy (Luminaire):	min. 21.750 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	823 (W) X 314 (L) X 121 (H)
Weight:kg.

Nema socket
7pin

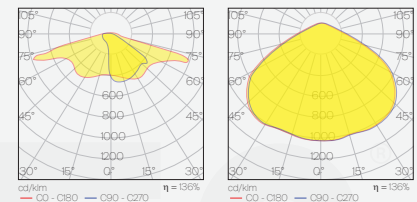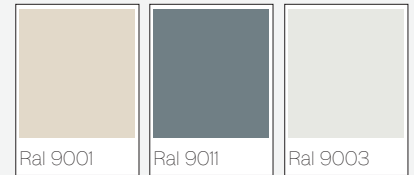

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	150 W	21.750lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	320 W	46.400lm.	2700 K , 6500 K	On/Off, DALIkg.


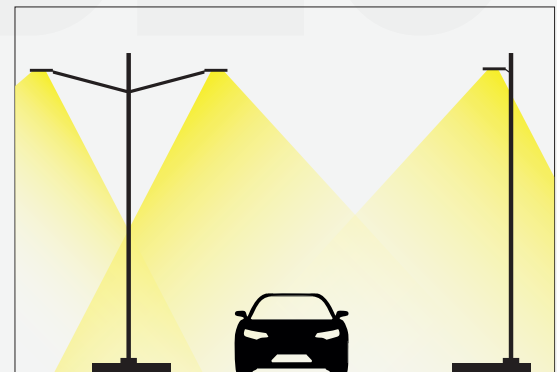


Product Detail




Rated power:	75W
Lumen efficacy (Luminaire):	min. 10.875 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common mode 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	528 (W) X 195 (L) X 96 (H)
Weight:kg.

Nema socket
7pin

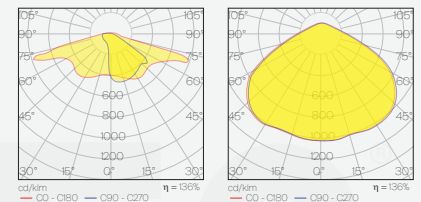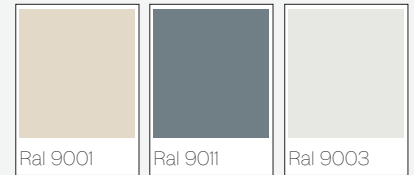

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	50 W	7.250lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	75 W	10.875lm.	2700 K , 6500 K	On/Off, DALIkg.

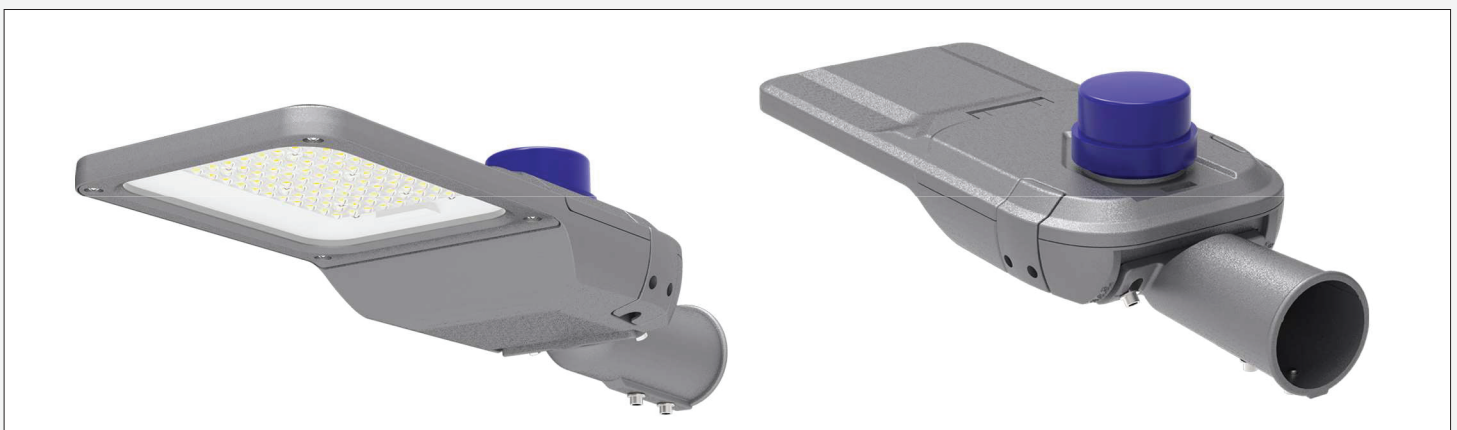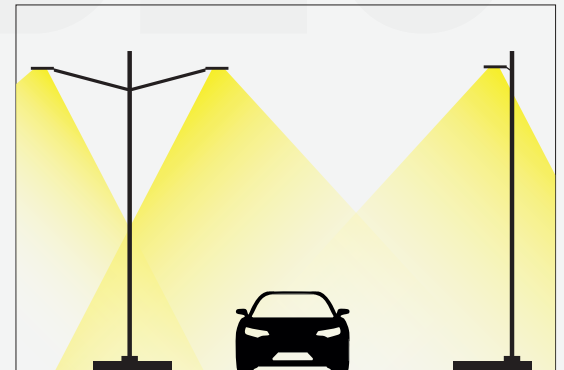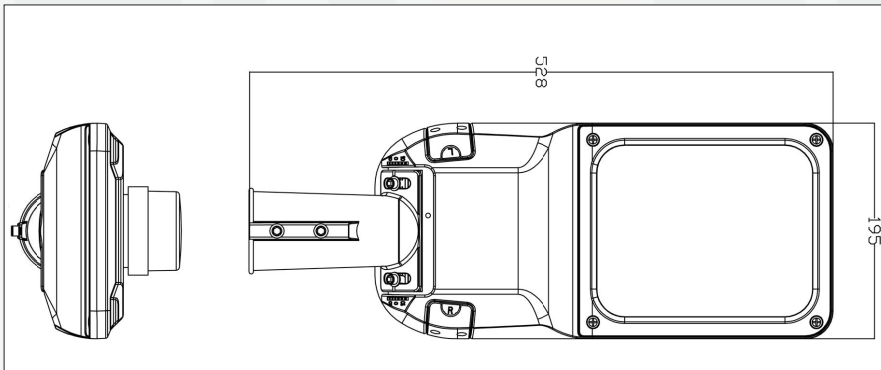

Altura

100-120W




CE  IK08 IP66

Product Detail




Rated power:	120W
Lumen efficacy (Luminaire):	min. 17.400 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	549 (W) X 220 (L) X 97 (H)
Weight:kg.

Nema socket
7pin

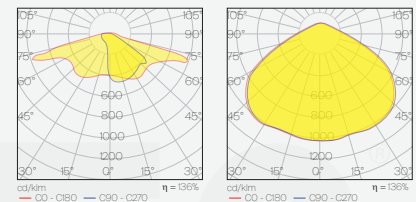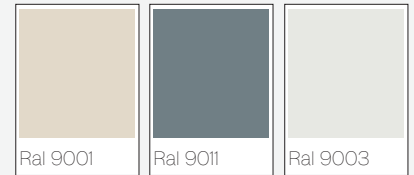

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Ridge	100 W	14.500lm.	2700 K , 6500 K	On/Off, DALIkg.
Ridge	120 W	17.400lm.	2700 K , 6500 K	On/Off, DALIkg.

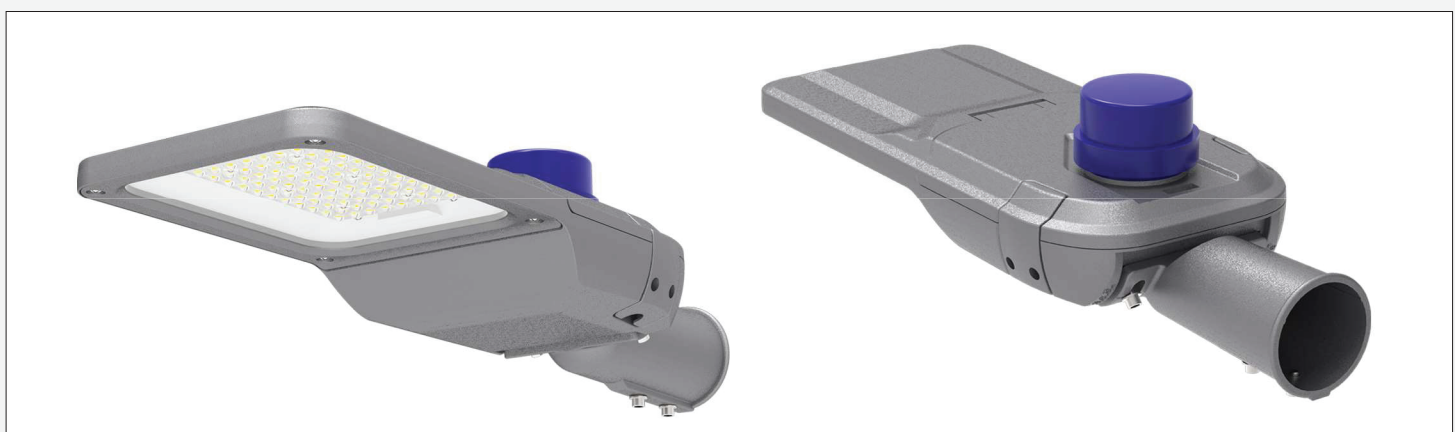
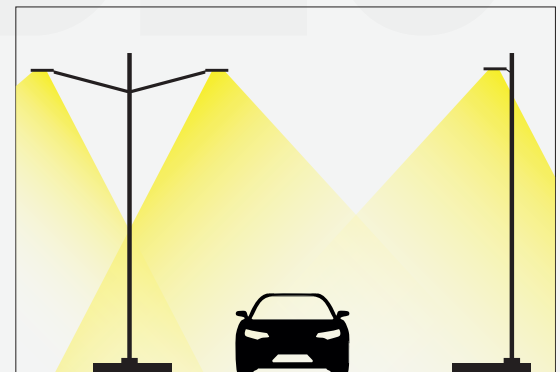
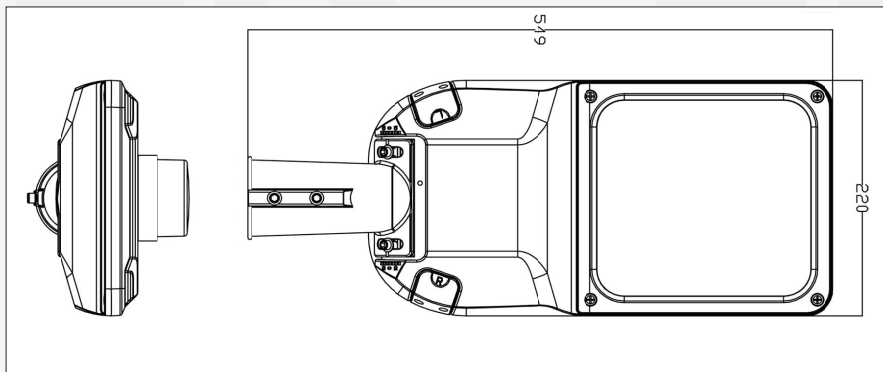


Product Detail



Rated power:	180W
Lumen efficacy (Luminaire):	min. 26.100 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	639 (W) X 250 (L) X 97 (H)
Weight:kg.

Nema socket
7pin

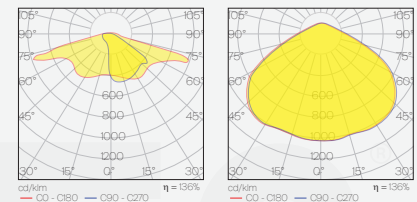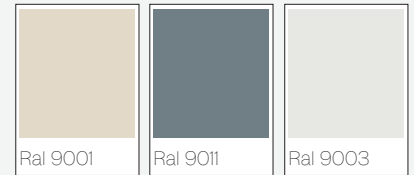

P. Name	Power	Lumen	C. Tempeture	Control	Weight
Altura	150 W	21.750lm.	2700 K , 6500 K	On/Off, DALIkg.
Altura	180 W	26.100lm.	2700 K , 6500 K	On/Off, DALIkg.

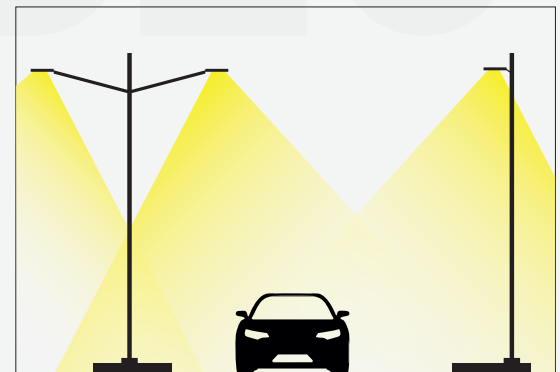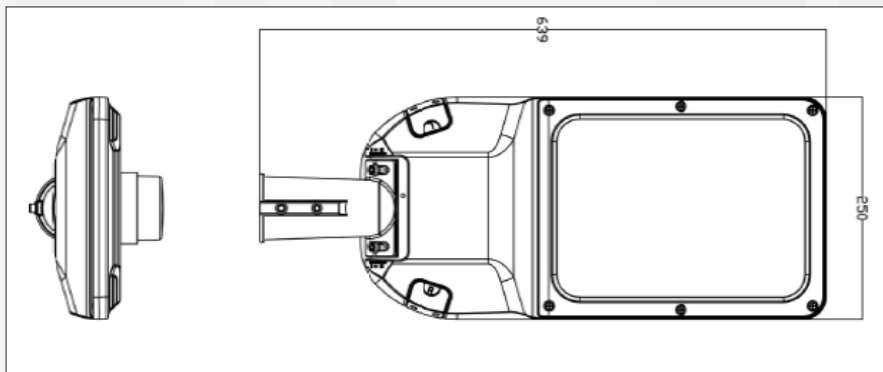

Altura

200-240W




CE  IK08 IP66

Product Detail



Rated power:	240W
Lumen efficacy (Luminaire):	min. 34.800 lm
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40°C to +55°C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h

Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Dimensions:	654 (W) X 280 (L) X 97 (H)
Weight:kg.

Nema socket
7pin

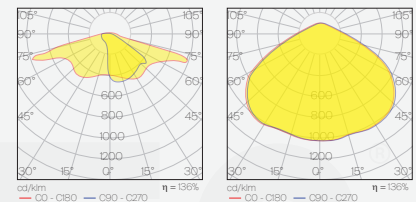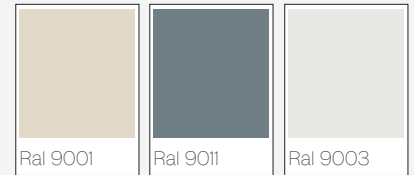


P. Name	Power	Lumen	C. Tempeture	Control	Weight
Altura	200 W	29.000lm.	2700 K , 6500 K	On/Off, DALIkg.
Altura	240 W	34.800lm.	2700 K , 6500 K	On/Off, DALIkg.

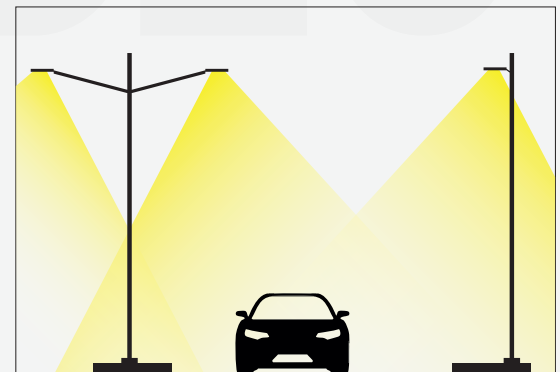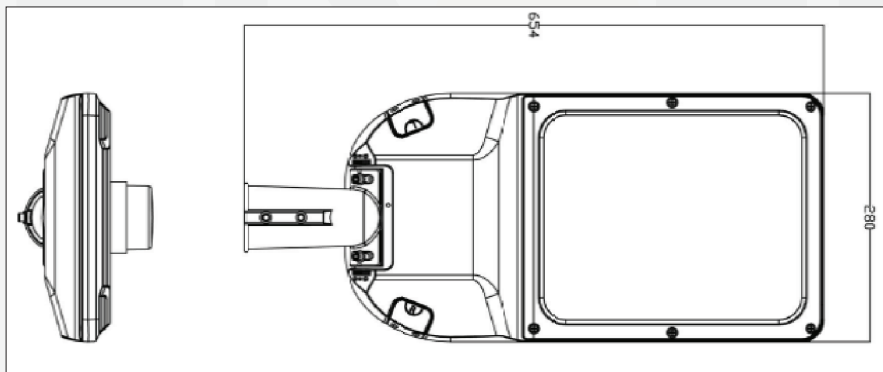




Product Detail

Rated power:	100W
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40'C to +55'C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Weight:kg.

Nema socket
7pin

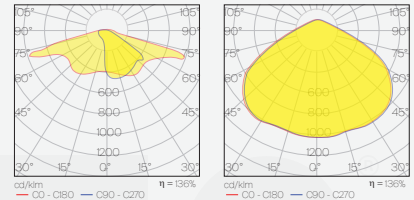


P. Code	P. Name	Power	Lumen	C. Tempeture	Control	Weight
.....	Aqua 40W	40 W	5.800lm.	3000 K , 4000 K	On/Off, DALIkg.
.....	Aqua 60W	60 W	8.700lm.	3000 K , 4000 K	On/Off, DALIkg.

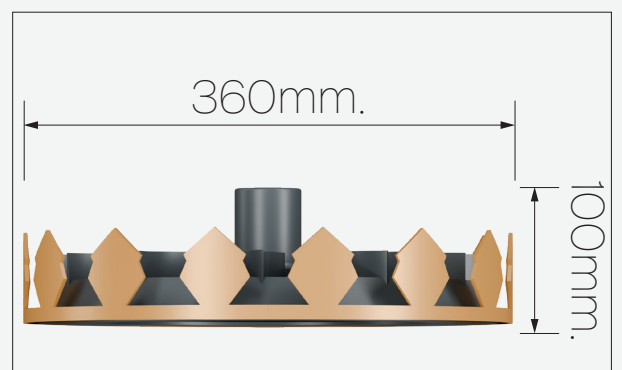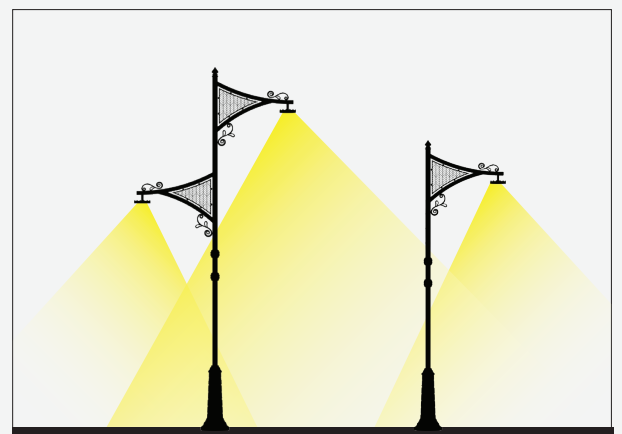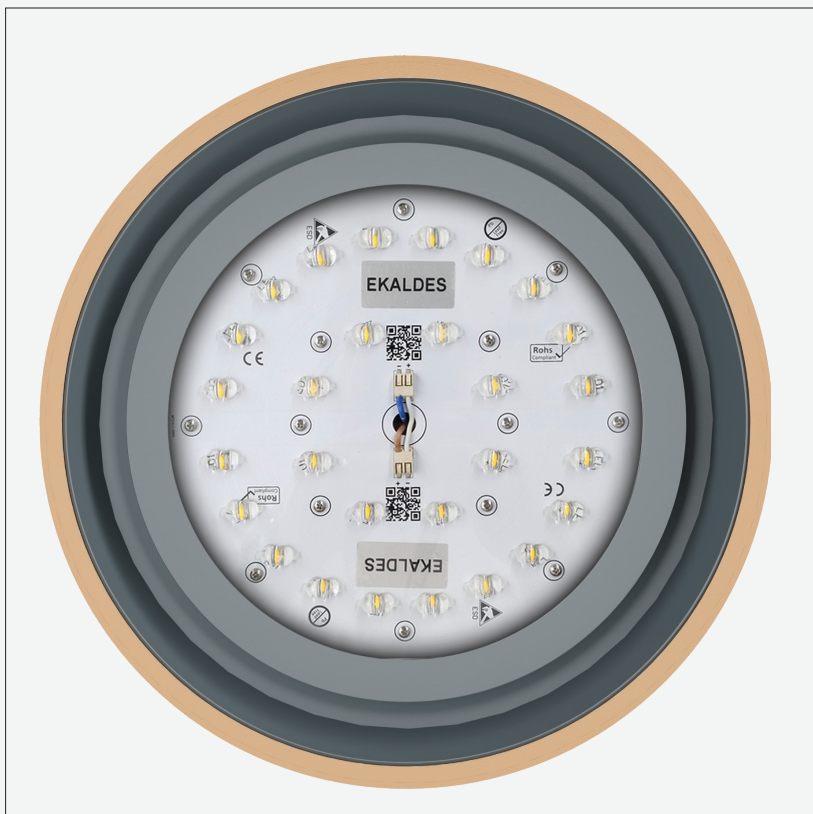

Product Detail

Rated power:	100W
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40'C to +55'C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common model 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Weight:kg.

Nema socket
7pin




Ral 9005




Ral 9011




Ral 7016





Ral 1032



Ral 1033



Ral 8023





P. Code	P. Name	Power	Lumen	C. Tempeture	Control	Weight
.....	Anchor 40W	40 W	5.800lm.	3000 K , 4000 K	On/Off, DALIkg.
.....	Anchor 60W	60 W	8.700lm.	3000 K , 4000 K	On/Off, DALIkg.



Product Detail

Rated power:	100W
Color temperature:	Ranging from 2200K up to 6500K
Operating voltage:	220~240 VAC
Operating frequency:	50~50 Hz
Ambient temperature:	from -40'C to +55'C
Optional lighting control:	DALI I Step-DIM I O - 10V
Overvoltage protection:	Internal 10kV common mode 6kV differential mode External 10kV overvoltage (optional)
LED lifetime:	L80 B10 / 100.000h
Color:	Optional RAL colors available
Ingress protection:	IP 67
Impact protection(BODY):	IK 09
Impact protection(GLASS):	IK 08
Smart lighting:	Nema or Zhaga optional
Body material:	Aluminum injection
Diffusor	Tempered glass
Surge protection	On/6kW
Weight:kg.

Nema socket
7pin

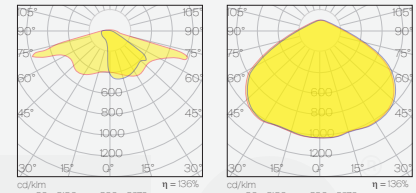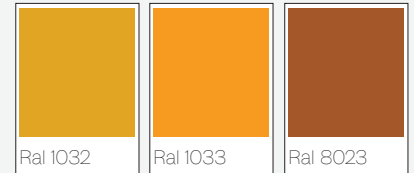

P. Code	P. Name	Power	Lumen	C. Tempeture	Control	Weight
.....	Anchor 40W	40 W	5.800lm.	3000 K , 4000 K	On/Off, DALIkg.
.....	Anchor 60W	60 W	8.700lm.	3000 K , 4000 K	On/Off, DALIkg.

